

Handy Pack 44

April 2017



Description

Superglass Handy Pack 44 is a lightweight, non-combustible glass mineral wool insulation roll. The flexible roll is perforated at 2x570mm & 3x380mm to allow easy installation between common joist spacings and minimum on-site cutting and waste.

Application

Superglass Handy Pack 44 is mainly used to provide thermal and acoustic insulation in lofts/cold roofs. However, it can be used in a number of other applications where a lightweight glass mineral wool product is required.



Thermal Insulation

Handy Pack 44 has a thermal conductivity of 0.044W/mK.



Recycled Content

Handy Pack 44 is manufactured from up to 84% recycled glass bottles.



BRE Green Guide Rating

Handy Pack 44 has a Generic BRE Green Guide Rating of A+.



Fire Performance

Handy Pack 44 has a fire classification of A1 non-combustible.

[teamworks]

www.superglass.co.uk

Your insulation team
Superglass

A  **TECHNONICOL** company

Handy Pack 44

Product dimensions and information						
Thickness (mm)	Length (m)	Width (mm)	Pack Area (m ²)	R-Value (m ² K/W)	Packs per pallet	Code
100	7.00	1140/2x570/3x380	7.98	2.25	30	5780
150	4.70	1140/2x570/3x380	5.36	3.40	30	5781
170	4.15	1140/2x570/3x380	4.73	3.85	30	5782*
200	3.25	1140/2x570/3x380	3.71	4.50	30	5783

*Non-Standard Product

U-Values							
U-Value (W/m ² K)	0.16	0.14	0.12	0.11	0.10	0.09	0.08
Thickness of insulation between joists (mm)	100	100	100	100	100	100	100
Thickness of insulation over joists (mm)	170	200	250 (100+150)	300 (2x150)	340 (2x170)	400 (2x200)	450 (3x150)

Typical U-Values achieved when using Handy Pack 44 in a standard loft application

Thermal Performance

Handy Pack 44 has a thermal conductivity of 0.044W/mK.

Fire Performance

Superglass products are classified as Euroclass A1 to BS EN 13501-1. Superglass products being non-combustible will not contribute towards a fire load.

Environment

Superglass products have zero Ozone Depletion Potential (ODP) and zero Global Warming Potential (GWP). The products are also CFC and HCFC free.

Recycled Content

Superglass products are manufactured from up to 84% recycled glass bottles which would otherwise go to landfill.

Quality

Superglass products are manufactured in accordance with BSI Quality Assurance Standard BS EN ISO 9001:2012.

Standards

Superglass products are manufactured in accordance with BS EN 13162:2015 and BS EN 13172:2015 for Factory made mineral wool products.

Durability

Superglass products are non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

Vapour Resistance

Superglass products offer negligible vapour resistance allowing vapour to pass freely through the insulation.

Handling & Storage

Superglass products are easy to handle, cut and install. The products are supplied compression packed in polythene to provide short term protection only. For long term protection, the product must be stored indoors or under a waterproof covering in order to protect from weather damage. The products should not be left permanently exposed to the elements.

Certification

CE Marked to BS EN 13162:2015.

A copy of the Handy Pack 44 Declaration of Performance (DoP) ref: DOP0009 can be downloaded from the Superglass website.

Associated Products

Multi-Roll 40

Multi-Roll 44

Superglass Insulation Limited

Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ

Technical

Hotline: **0844 381 4022**

Email: technical@superglass.co.uk

Fax: **01786 451245**

Sales

Tel: **01786 451170**


Email: sales@superglass.co.uk

Fax: **01786 451245**


Follow us on:

 www.facebook.com/superglassinsulationltd

 www.twitter.com/superglassins


 www.linkedin.com/company/superglass-insulation-ltd

 www.pinterest.com/superglassins

 [superglass_insulation](https://www.instagram.com/superglass_insulation)

All rights are reserved, including those of photomechanical reproduction and storage in electronic media. Commercial use of the processes and work activities presented in this document is not permitted. Extreme caution was observed when putting together the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of errors pointed out.

DS01:21436

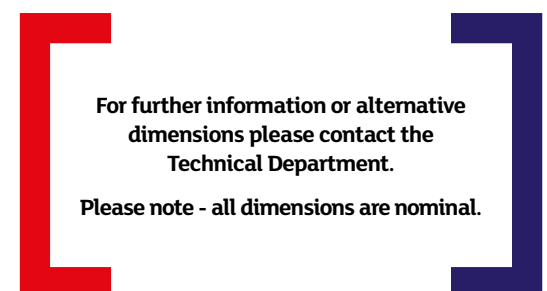

Your insulation team
Superglass

A  **TECHNICOL** company